

8CH 1HDD NVR with 8CH PoE

8CH 1HDD 8CH PoE 8K NVR



Key Features

- Up to 8-ch IP cameras access
- Up to 40 Mbps incoming/outgoing bandwidth
- Up to 1-ch @ 8MP/4-ch @ 1080P/8-ch @ D1 decoding capacity
- 1 SATA hard disk up to 8TB
- Plug & Play with 8 PoE Ports
- Supports 1 HDMI and 1 VGA interface, maximum resolution of HDMI is 4K




Specifications

Video Input	
IP Camera Input	8 Channel
Incoming Bandwidth	40 Mbps
Outgoing Bandwidth	40 Mbps
Video Output	
HDMI Output	3840 × 2160, 1920 × 1080, 1280 × 1024, 1024 × 768
VGA Output	1920 × 1080, 1280 × 1024, 1024 × 768
Decoding Capacity	1ch 8MP, 4ch 1080P, 8ch D1
Dual Stream	Support
Multi-screen Display	1/4/9
Recording	
Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080P, 720P, D1 etc.
Recording Mode	Manual, Schedule (Regular, Continuous), Event
Trigger Events	Motion Detection, Video Loss, IVS
Playback and Backup	
Sync Playback	8/4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Backup Mode	USB Device, Network
Alarm	
General Alarm	Motion Detection, Video Loss
Intelligent Analysis (By Camera)	Smoking Detection, Smoke and Fire Detection, Fire Spot Detection, Intrusion, Single Line Crossing, Double Line Crossing, Loitering, Wrong-way, Illegal Parking, People Counting, Smart motion detection, Enter Area, Leave Area, etc.
Abnormal Alarm	Disk Alarm, IP Address Conflict, Network Disconnect
Network	
Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE
Remote Users	8 users
P2P	Support
Interoperability	ONVIF, SDK, CGI
Storage	

ANR	Support
Interface	
HDD Interface	1 SATA interfaces, up to 8TB capacity for each disk
Network Interface	1 × RJ-45, 10/100 Mbps self-adaptive Ethernet port
PoE Interface	8 ports, 10/100Mbps, 802.3af, max 48W
HDMI	1
VGA	1
Audio In/Out	1ch audio output
USB Interface	Front panel: 2 × USB 2.0, Rear panel: 1 × USB 2.0
General	
Power Supply	48VDC/1.25A
Power Consumption	< 15 W (without HDD)
Operating Conditions	-10 °C to 50 °C (14 °F to 122 °F)
Storage Conditions	Less than 90% RH
Certifications	CE/FCC, RCM
Dimensions	255 × 235.0 × 45.3 mm (10.04 × 9.25 × 1.78 inch)
Net Weight	1 kg (2.2 lb) without HDD

Dimensions (mm)

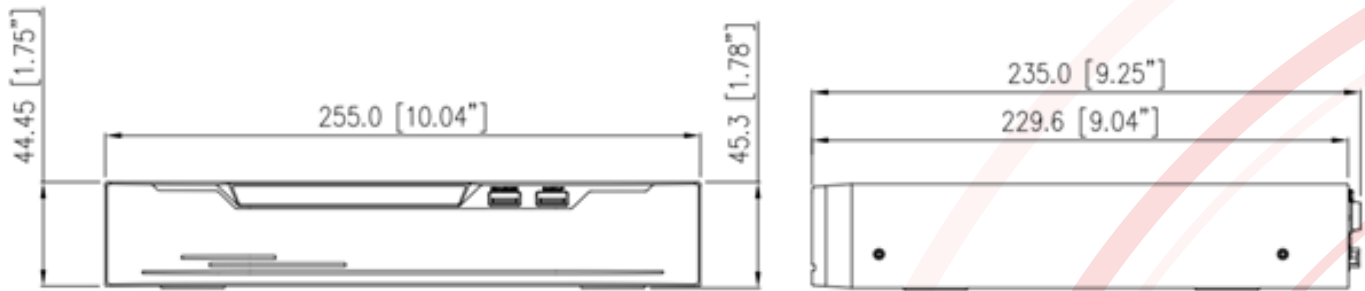

Rear Panel

